




serviacero[®]
comercial



• PTR Profile (square)

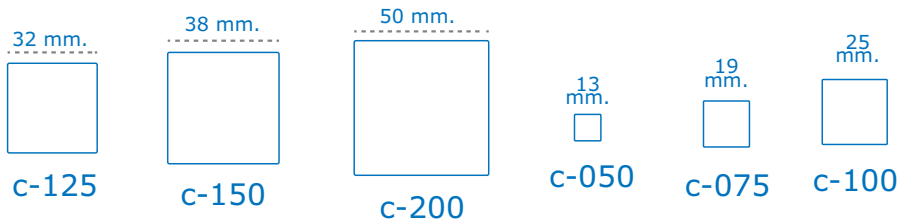


Square			
No.	Thickness	kg x m	Kg x Pc
C-150	16	1.81	10.86
	18	1.46	8.76
	20	1.10	6.60
C-125	18	1.21	7.26
	20	0.91	5.46
C-100	16	1.20	7.20
	18	0.95	5.70
	20	0.72	4.32
C-075	18	0.70	4.20
	20	0.54	3.24
C-050	18	0.47	2.82
	20	0.35	2.10
C-200	16	2.00	14.43
	18	1.94	11.64



serviacero
comercial

• PTR Profile (rectangular)

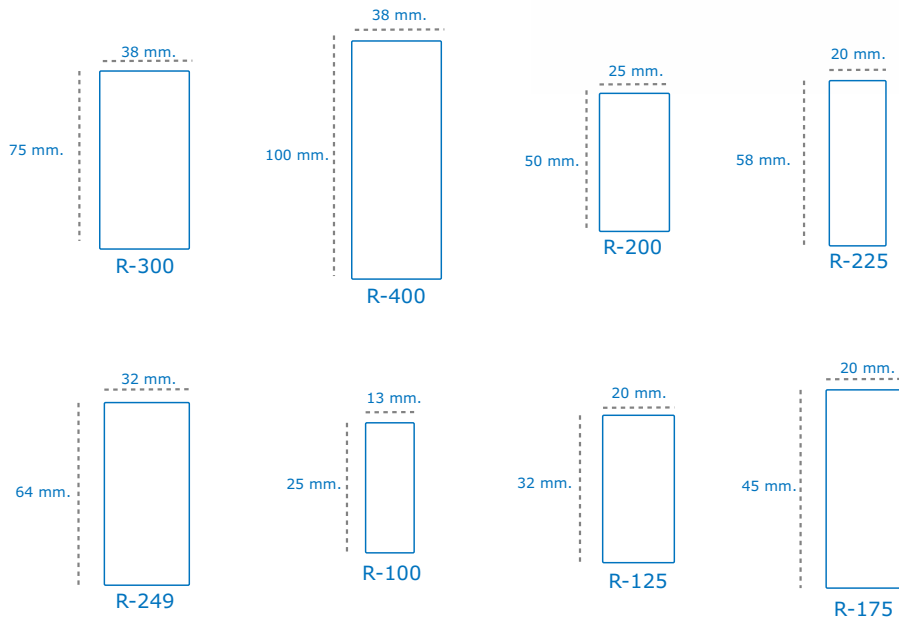

Rectangular			
No.	Thickness	kg x m	Kg x Pc
R-225	18	1.46	8.76
	20	1.10	6.60
R-175	18	1.21	7.26
	20	0.91	5.46
R-125	18	0.95	5.70
	20	0.72	4.32
R-100	18	0.70	4.20
R-200	18	1.46	8.76
	20	1.10	6.60
R-249	18	1.83	10.98
	20	1.38	8.28
R-400	18	2.65	15.9
	20	1.99	11.94
R-300	18	2.16	12.96
	20	1.62	9.72