





• Punched Monten Pole

We manufacture purlin with perforations, our gages are from 9 to 16 and lengths according to your project. We have manufacturing capacity for structural steel elements up to 14 meters long. Finishes: painted, bare and galvanized. Quality: standard and high strength: Section shapes: "Z", "U", "C" and poultry purlin.

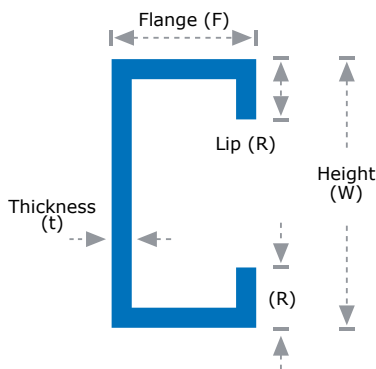


"C" Purlin							
Height		Flange		Lip		Thickness	
W (in)		F (in)		R (in)		t (in)	
from	to	from	to	from	to	from	to
4	14	2.00	2.50	0.50	0.75	0.06	0.15
6	14	2.00	4.00	0.50	0.75	0.06	0.15
6	14	2.75	4.00	0.50	0.86	0.06	0.15
6	14	3.00	4.00	0.50	1.00	0.06	0.15
3	14	1.50	1.50	0.50		0.06	0.10

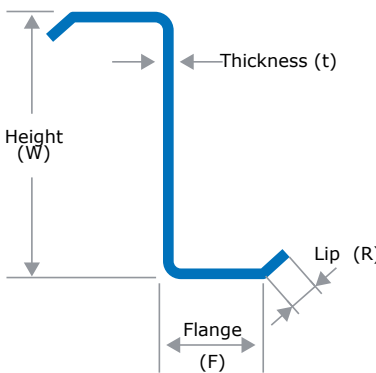


"Z" Purlin							
Height		Flange		Lip		Thickness	
W (in)		F (in)		R (in)		t (in)	
from	to	from	to	from	to	from	to
4	14	1.50	2.50	0.50	0.75	0.06	0.15
6	14	2.00	4.00	0.50	0.75	0.06	0.15
6	14	3.00	4.00	0.50	1.00	0.06	0.15



Punched Monten Pole

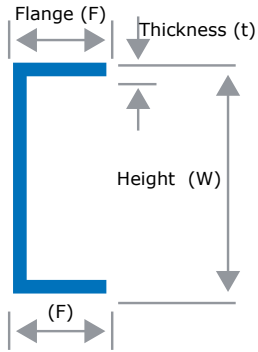

"U" Purlin					
Height		Flange		Thickness	
W (in)		F (in)		t (in)	
from	to	from	to	from	to
4	14	1.00	3.00	0.06	0.15
6	14	1.00	4.00	0.06	0.15
3	14	1.00	1.50	0.06	0.15

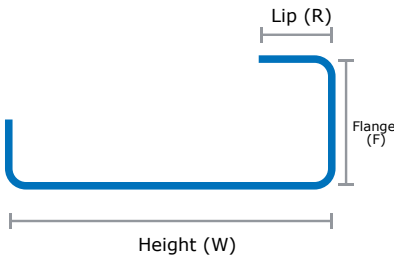

"Poultry" Purlin							
Height		Flange		Lip		Thickness	
W (in)		F (in)		R (in)		t (in)	
from	to	from	to	from	to	from	to
4	14	2.00	2.50	0.50	0.75	0.06	0.14
6	14	2.00	4.00	0.50	0.75	0.06	0.14
6	14	2.75	4.00	0.50	0.86	0.06	0.14
6	14	3.00	4.00	0.50	1.00	0.06	0.14
3	14	1.50	1.50	0.50		0.06	0.10

Length			
Min.	4	Max.	14
Tolerances			
Height	+/- 2mm		
Flange	+/- 2mm		
Length	+/- 3mm		
Punching	+/- 1.5mm		

Perforation	
Type	Size
Round	5/8"
Oblong	5/8" x 3/4"
Round	3/4"
Oblong	3/4" x 1"

Finishes	
Black	
Painted (Brown)	
Galvanized	
Grade	
A	Standard
C	High strength

Note: Measurements must be taken no less than 1 ft from the end.