

• Electroforged grid treads

Stair Steps				
Width (in)/(mm)	Maximum Tread Length*			
	Plain Surface		Plain Surface	
	Flat	Serrated	Flat	Serrated
3/4 x 3/16 (19 x 5) 1 x 3/16 (25 x 5) 1 1/4 x 3/16 (32 x 5) 1 1/2 x 3/16 (38 x 5)	2' - 4" (.71m)		2' - 8" (.81m)	
	3' - 5" (1.04m)	2' - 10" (.86m)	4' - 0" (1.22m)	
	4' - 8" (1.42m)	4' - 2" (1.27m)	5' - 1" (1.55m)	
	5' - 6" (1.67m)	5' - 3" (1.60m)	5' - 6" (1.67m)	5' - 6" (1.67m)

Available Widths	8 2/3"	9 5/6"	11"	12 1/5"
"X" Distance Between Drilling Centers	4 1/2"	7"	7"	7"


Width Recommended to Tread		
Mod	W19	
Width	8 2/3"	220 mm
	9 5/6"	250 mm
	11"	280 mm
	12 1/2"	310 mm



serviacero[®]
electroforjados



• Electroforged grid treads

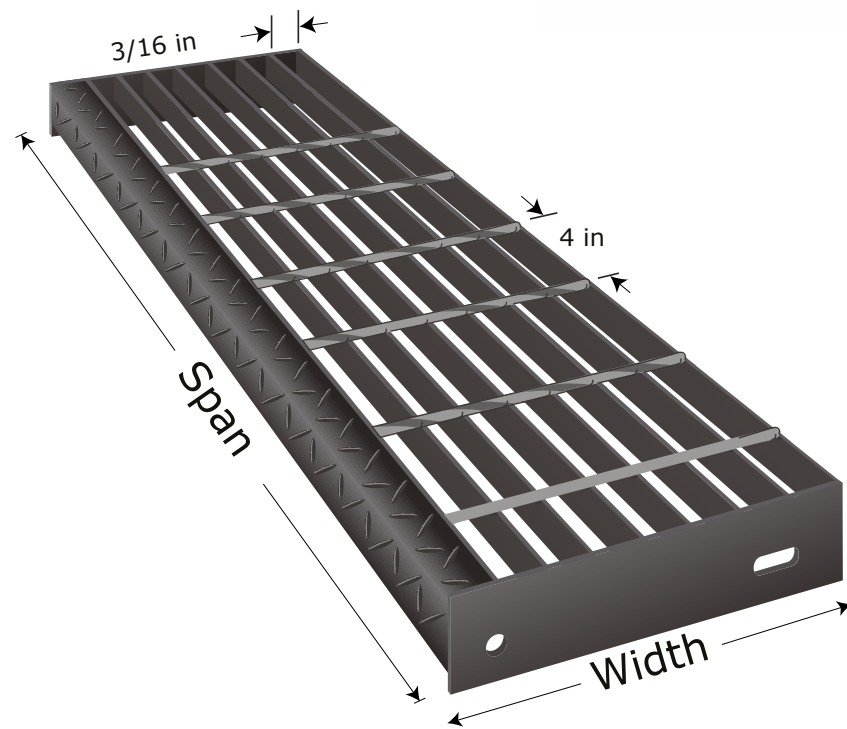

Surface and finished		
Surface	Finished	Model
Flat	Mild (bearing bar and cross bar uncoated)	W19-100
	Paint (water based coating)	
Serrated	Galvanized (galvanized standard ASTM-A-123)	