


## Losacero 25

In Serviacero Comercial we manufacture a steel roof sheet named Losacero, under the highest quality standards, offering a system with excellent structural resistance and reducing construction times for floors and ceilings.

Losacero (steel roof sheet).		
Material	Galvanized sheet 4 ft. wide.	Effective weight
Thicknesses	C-18 to C-24 (0.0478" to 0.0239")	91.5 cm
Steel grade	Structural steel GR 37	Fy: 37 ksi
Roll width	Minimum 48"	Maximum 48.1875"
Sheet length	<b>Specified length</b>	<b>Tolerance</b>
	From 2.00 to 12.20	-0 / + 6 mm
Package height	35 cm max. including pallets / poles	
Package weight	3,000 kg max. per 20 ft section	

**Covering capacity** Nominal 91.5 cm (36.0") Minimum 90.488 cm (35.625") Maximum 93.345 cm (36.75")

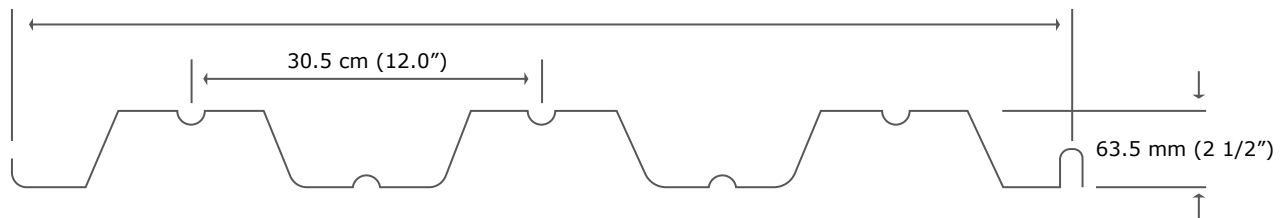

# TECHNICAL SHEET



**serviacero**  
comercial



## Losacero 25

### Theoretical weights table

Thickness	Steel Base		Weight		Superior Compression m+			Lower compression M-			adm. Vay (kg/M width)	Effective width
	mm	Inch	kg/ml	kg/m2	Ixe +	Sxe+	M axo+	Ixe -	Sxe-	Maxo -		
					cm4/m	cm3/m	Kg-m	cm4/m	cm3/m	kg-m		
24	0.607	0.0239	5.8	6.04	51.07	13.01	203	51.07	13.75	214	1397	0.915
22	0.759	0.0299	7.6	8.31	67.48	18.01	281	67.03	18.82	293	2206	0.915
20	0.912	0.0359	9.06	9.9	88.46	23.14	361	83.46	24.08	375	3181	0.915
18	1.214	0.0478	11.96	13.07	111.32	32.76	511	111.32	34.13	532	4213	0.915

comercial@serviacero.com  
www.serviacero.com/comercial

León Matriz: (477) 194 1000  
León Morelos: (477) 194 1020  
León San Crispín: (477) 194 1030  
Monterrey: (81) 8850 5800  
Aguascalientes: (449) 500 5000

Celaya: (461) 202 5200  
Querétaro: (442) 153 7300  
Morelia: (443) 500 4200  
Guadalajara: (33) 3001 5400  
Pachuca: (771) 273 2800